FIG 1

2 / 7

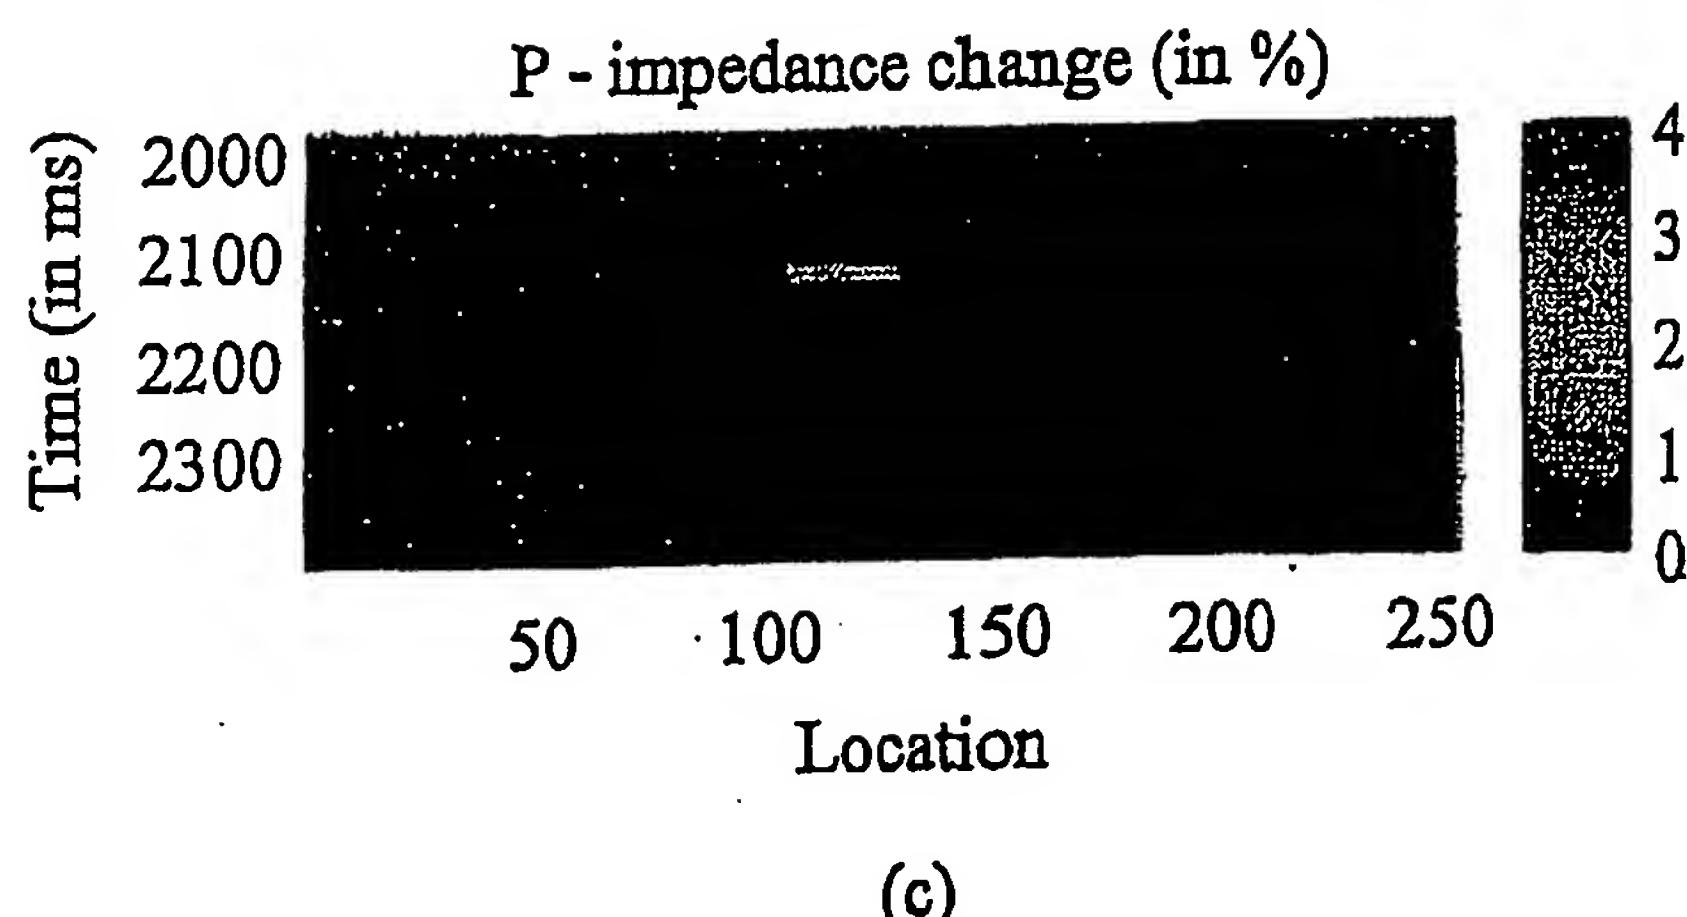
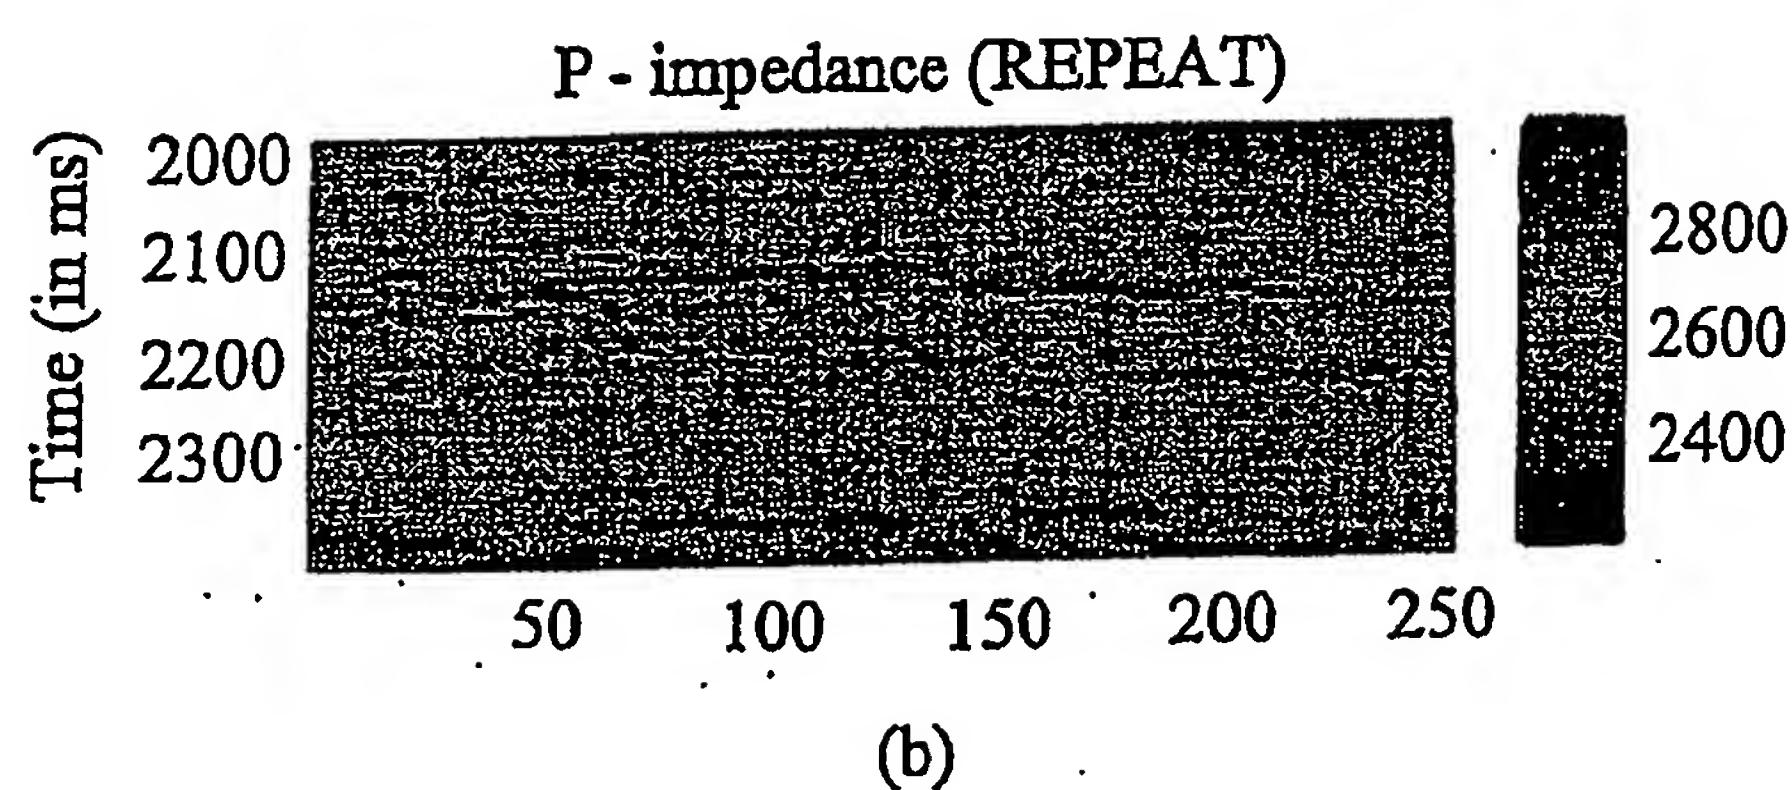
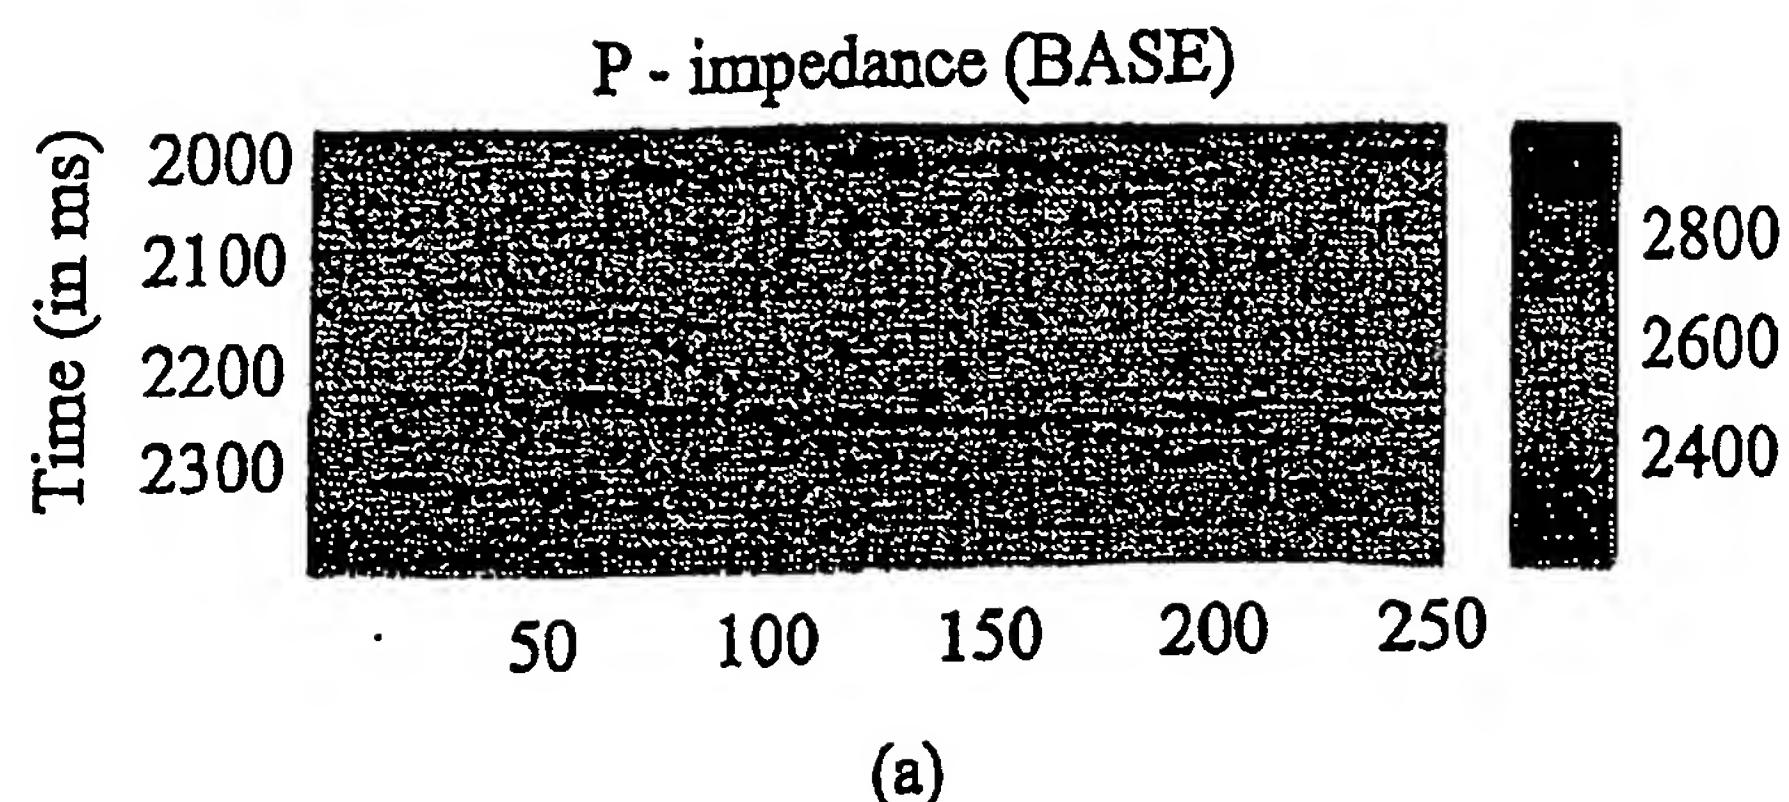


FIG 2

3 / 7

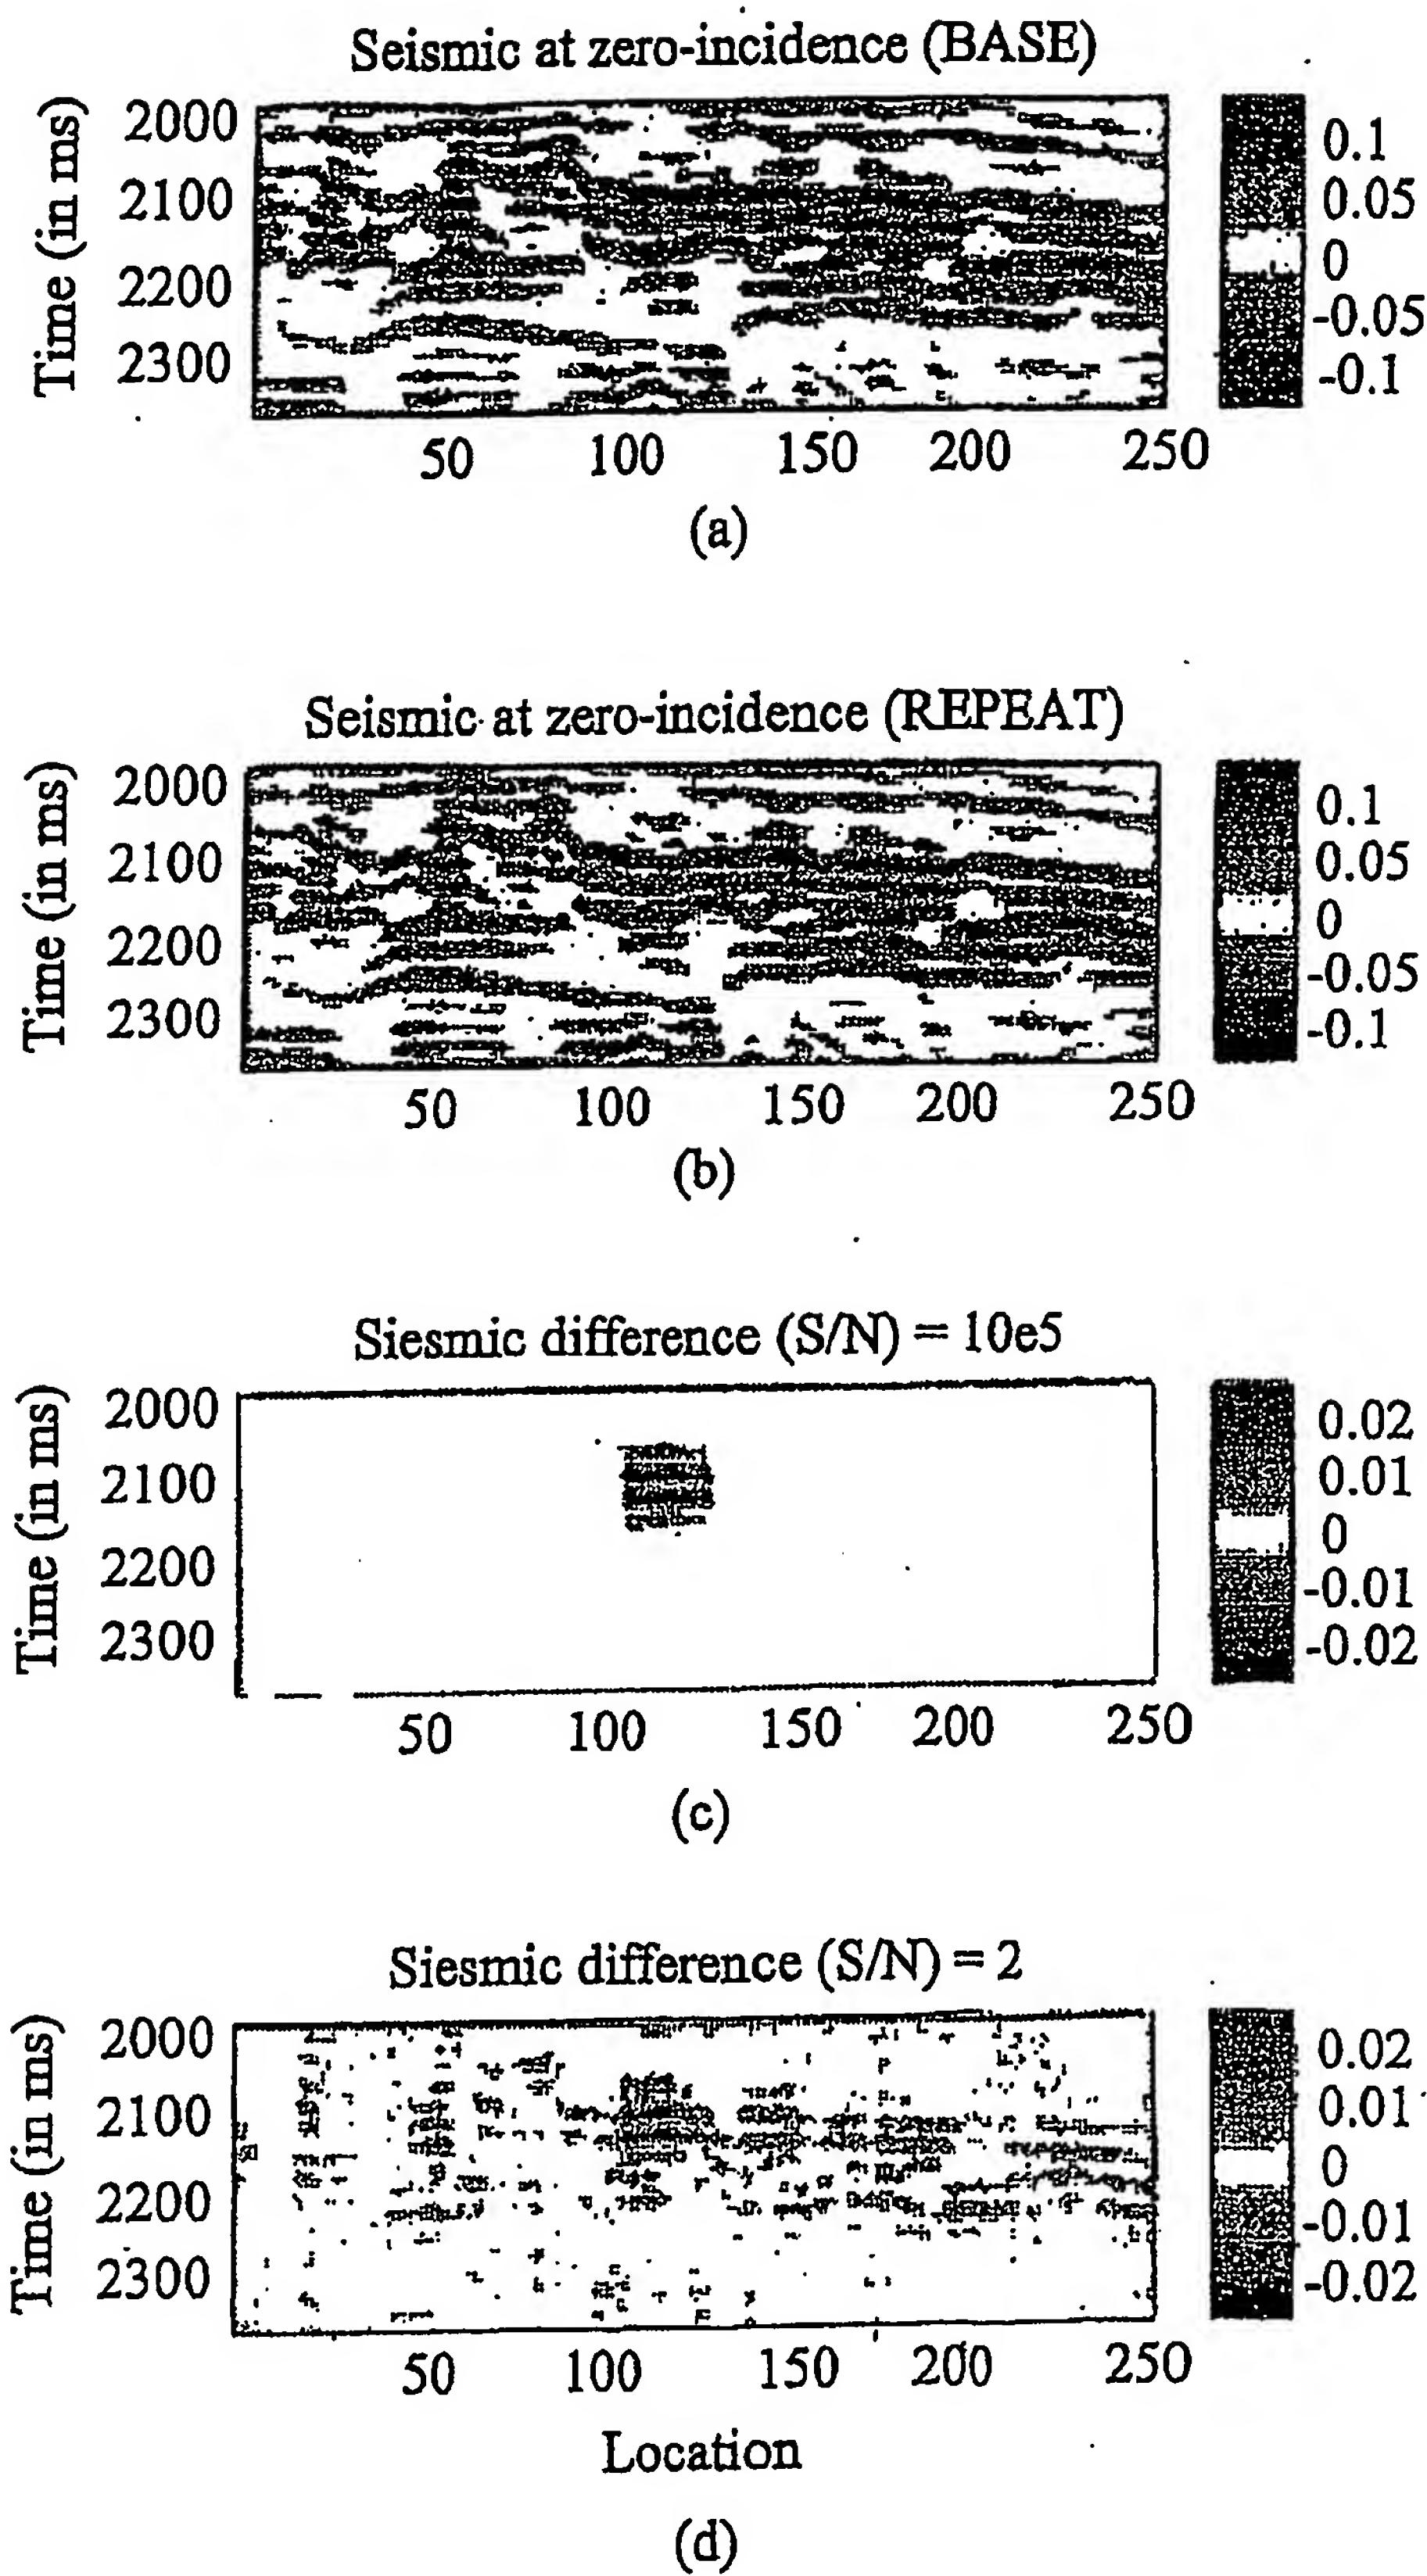


FIG 3

BEST AVAILABLE COPY

4 / 7




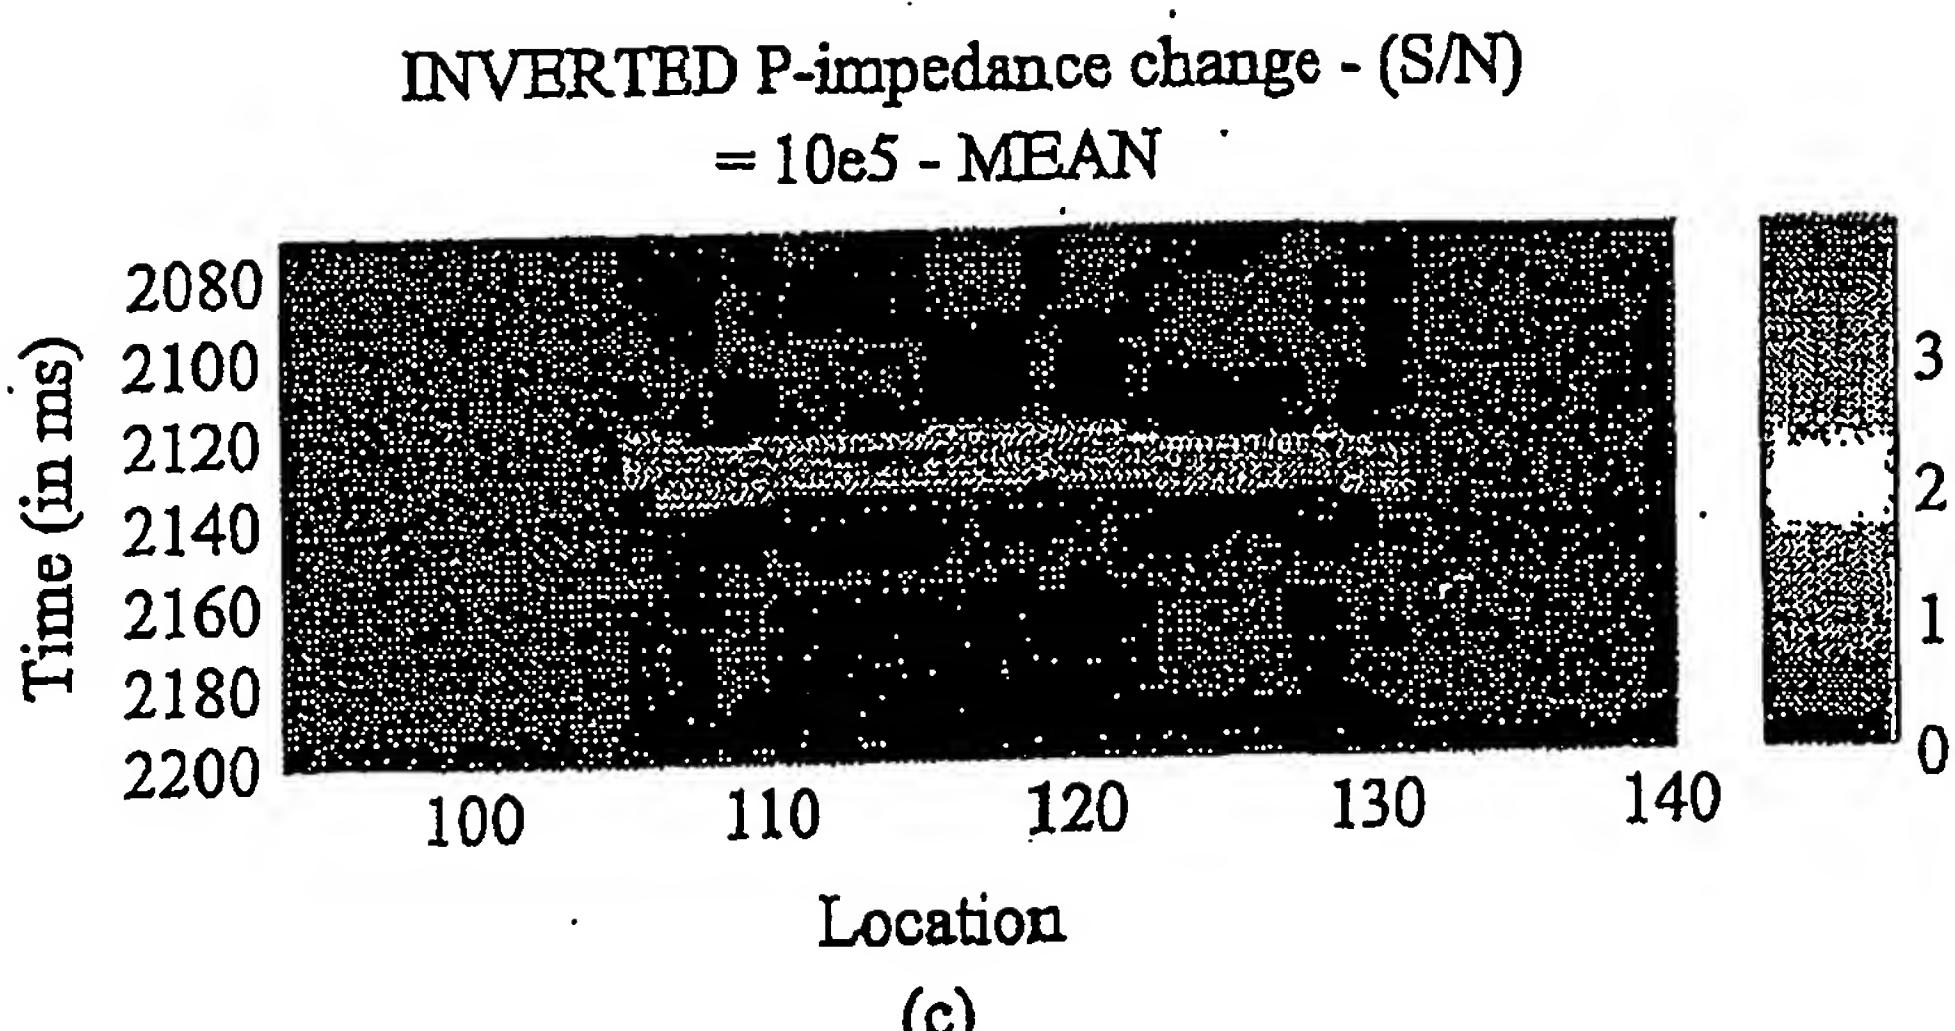


FIG 4


BEST AVAILABLE COPY

True P-impedance change (in %)

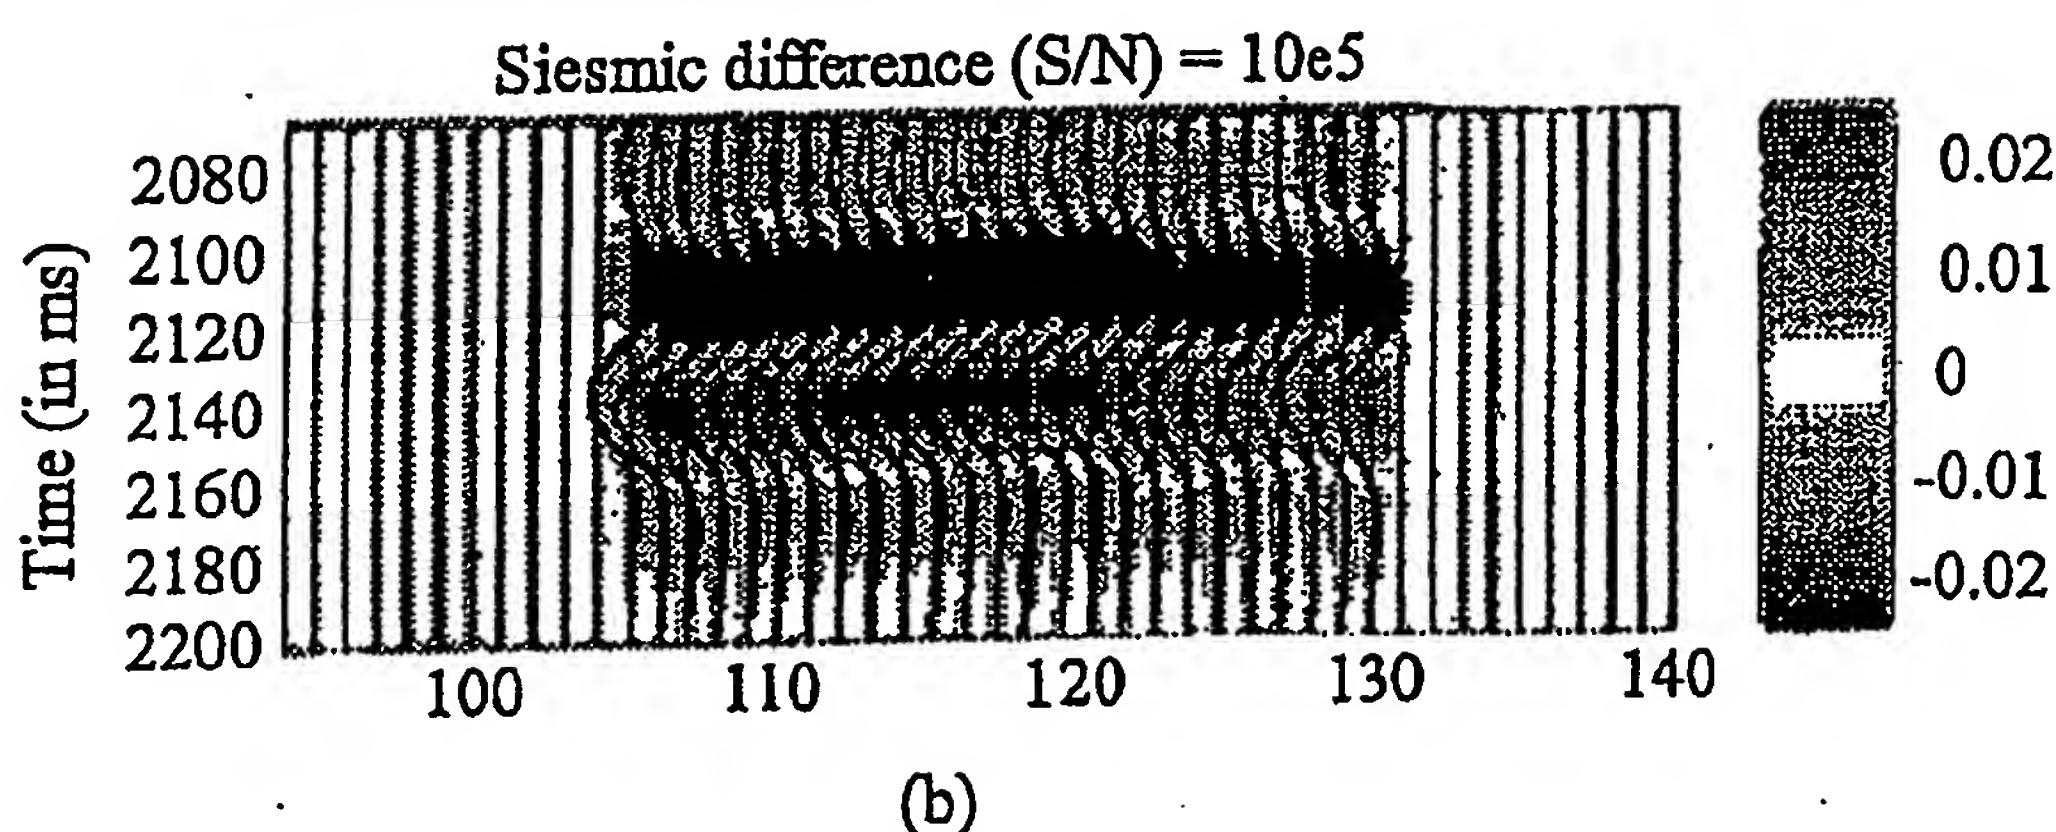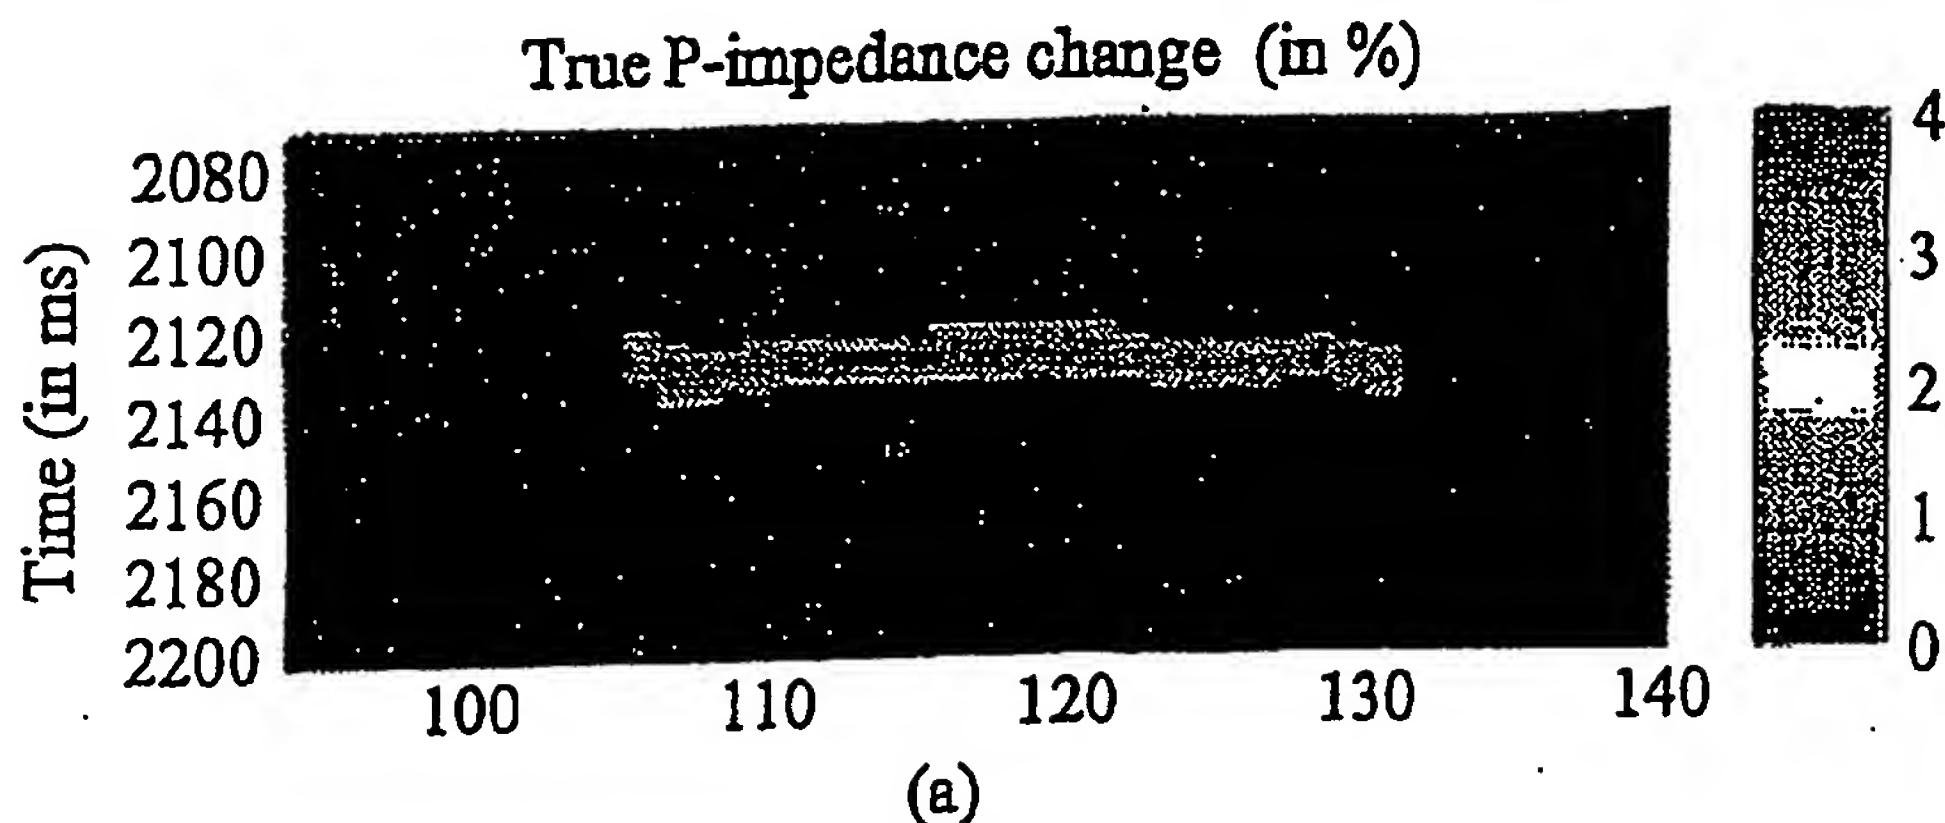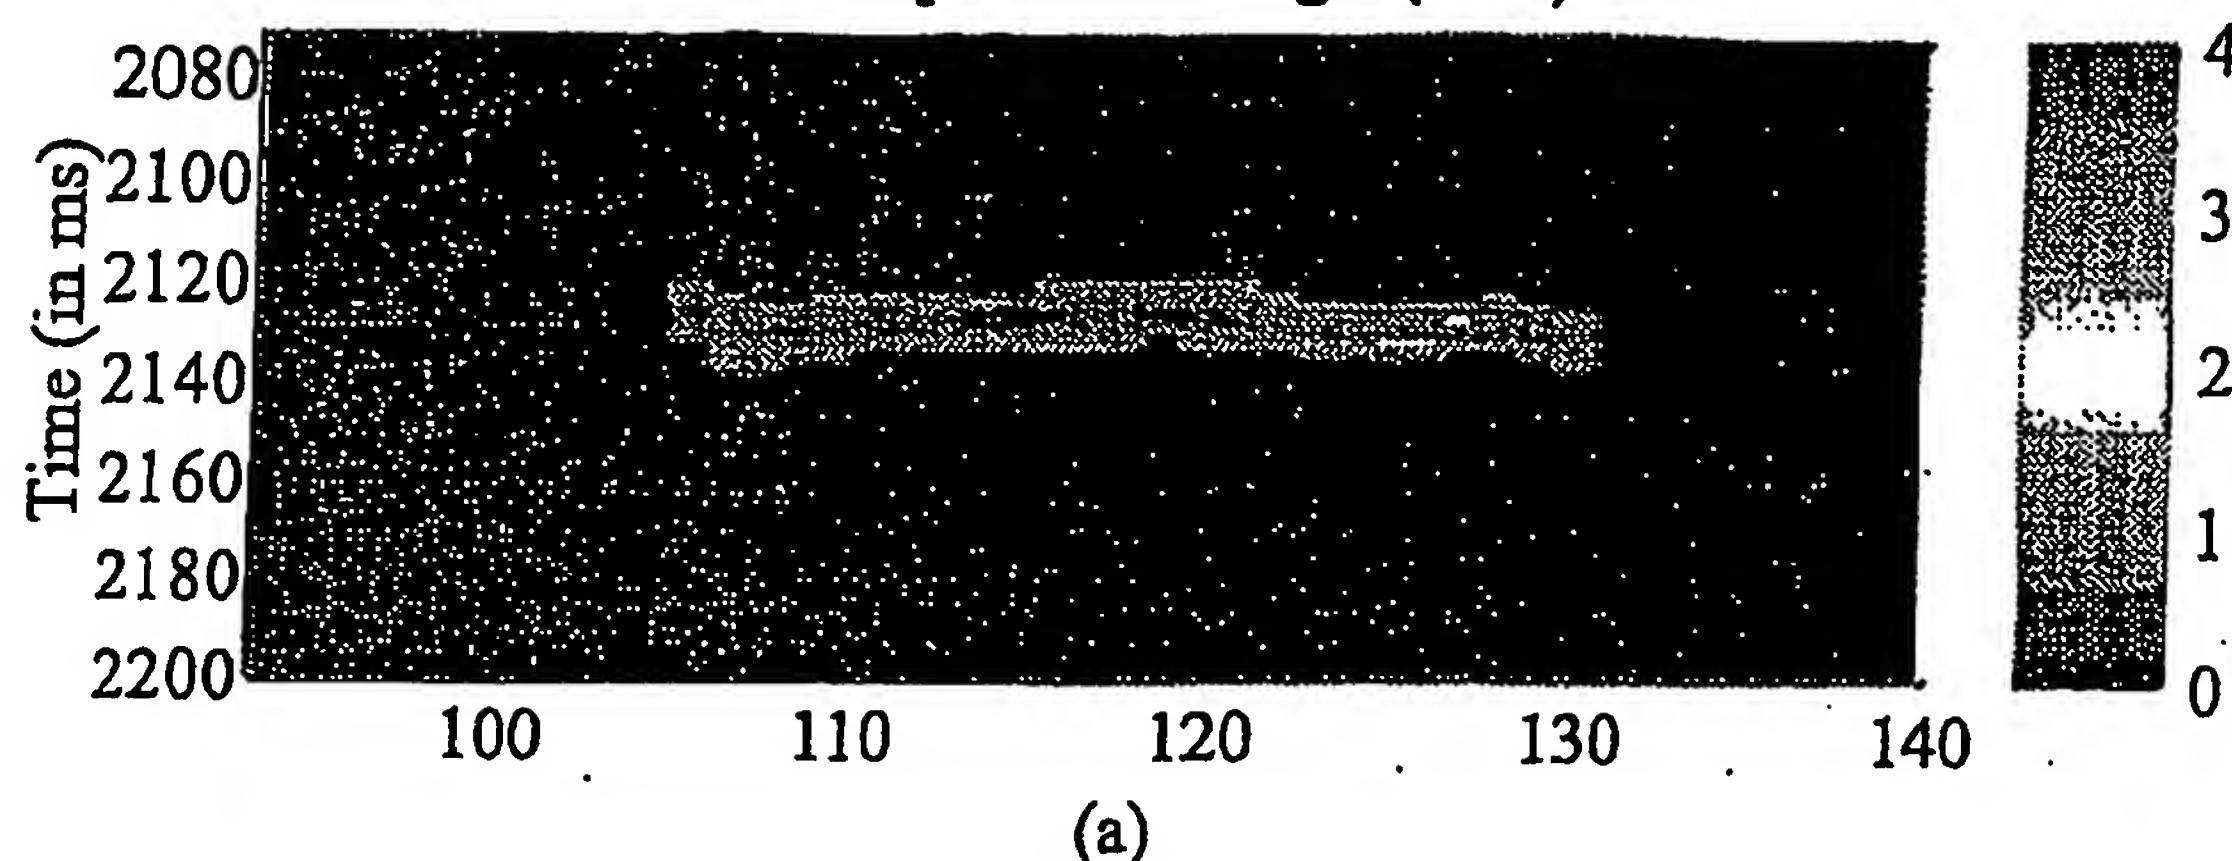


(a)

Siesmic difference (S/N) = 2

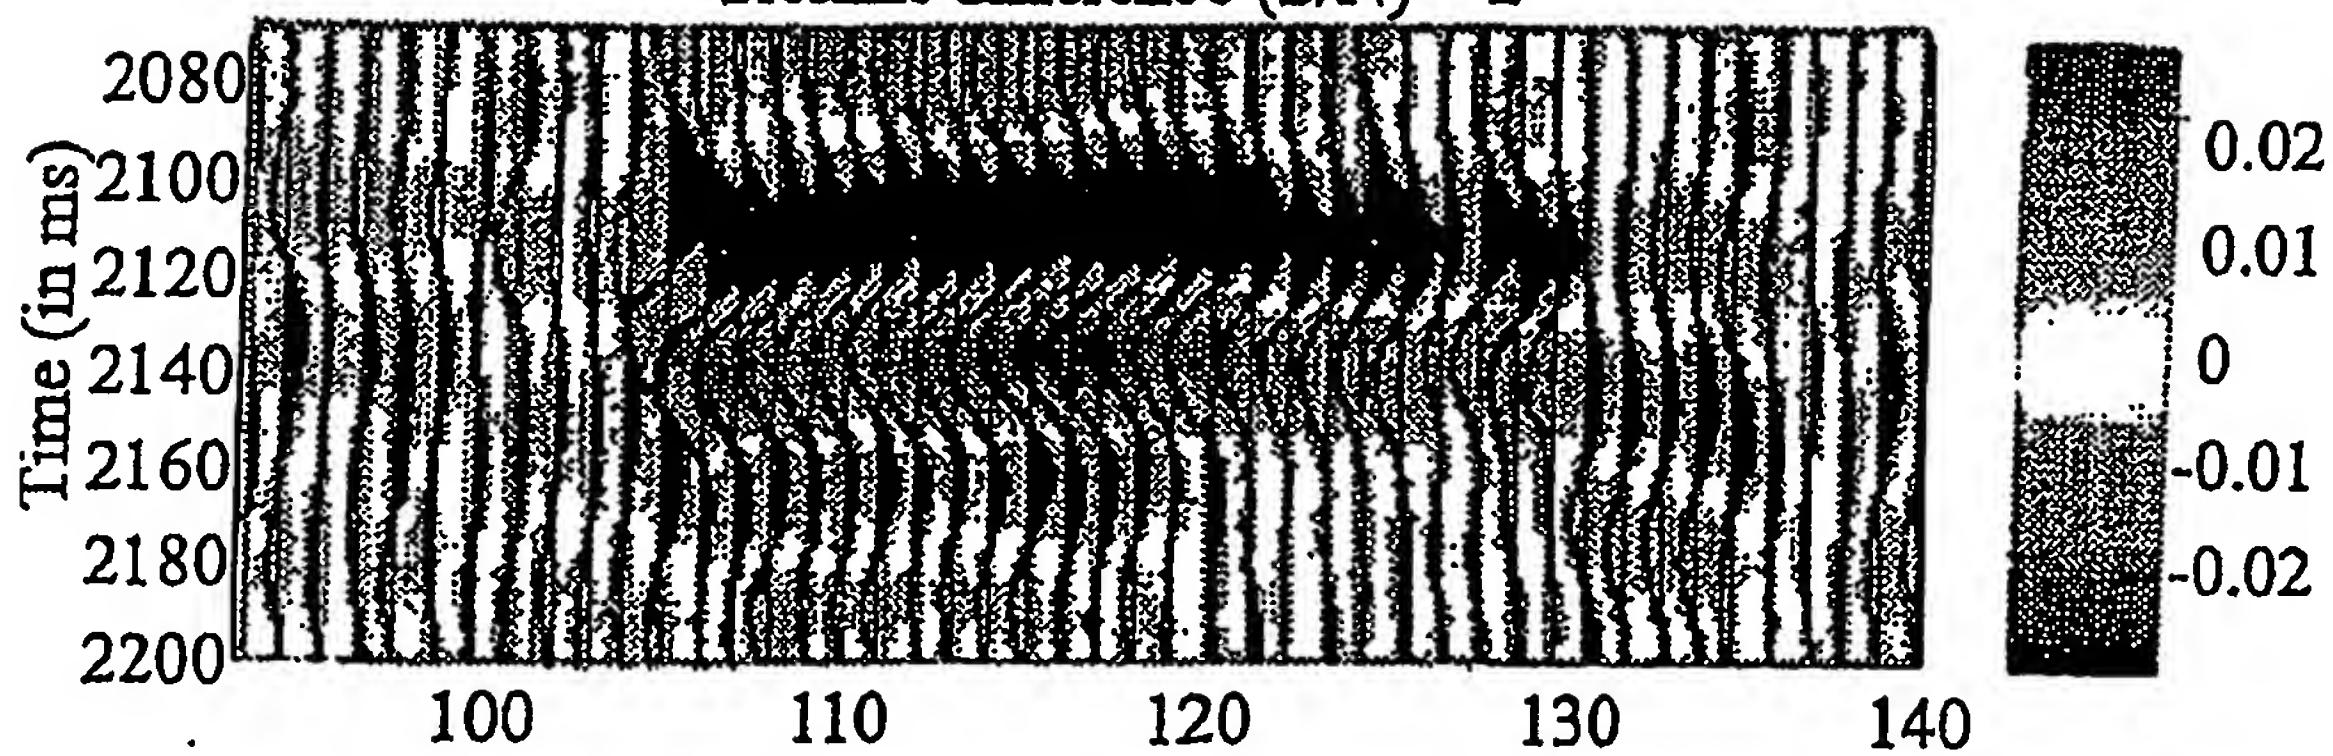

(b)

INVERTED P-impedance change - (S/N)
= 2 - mean -

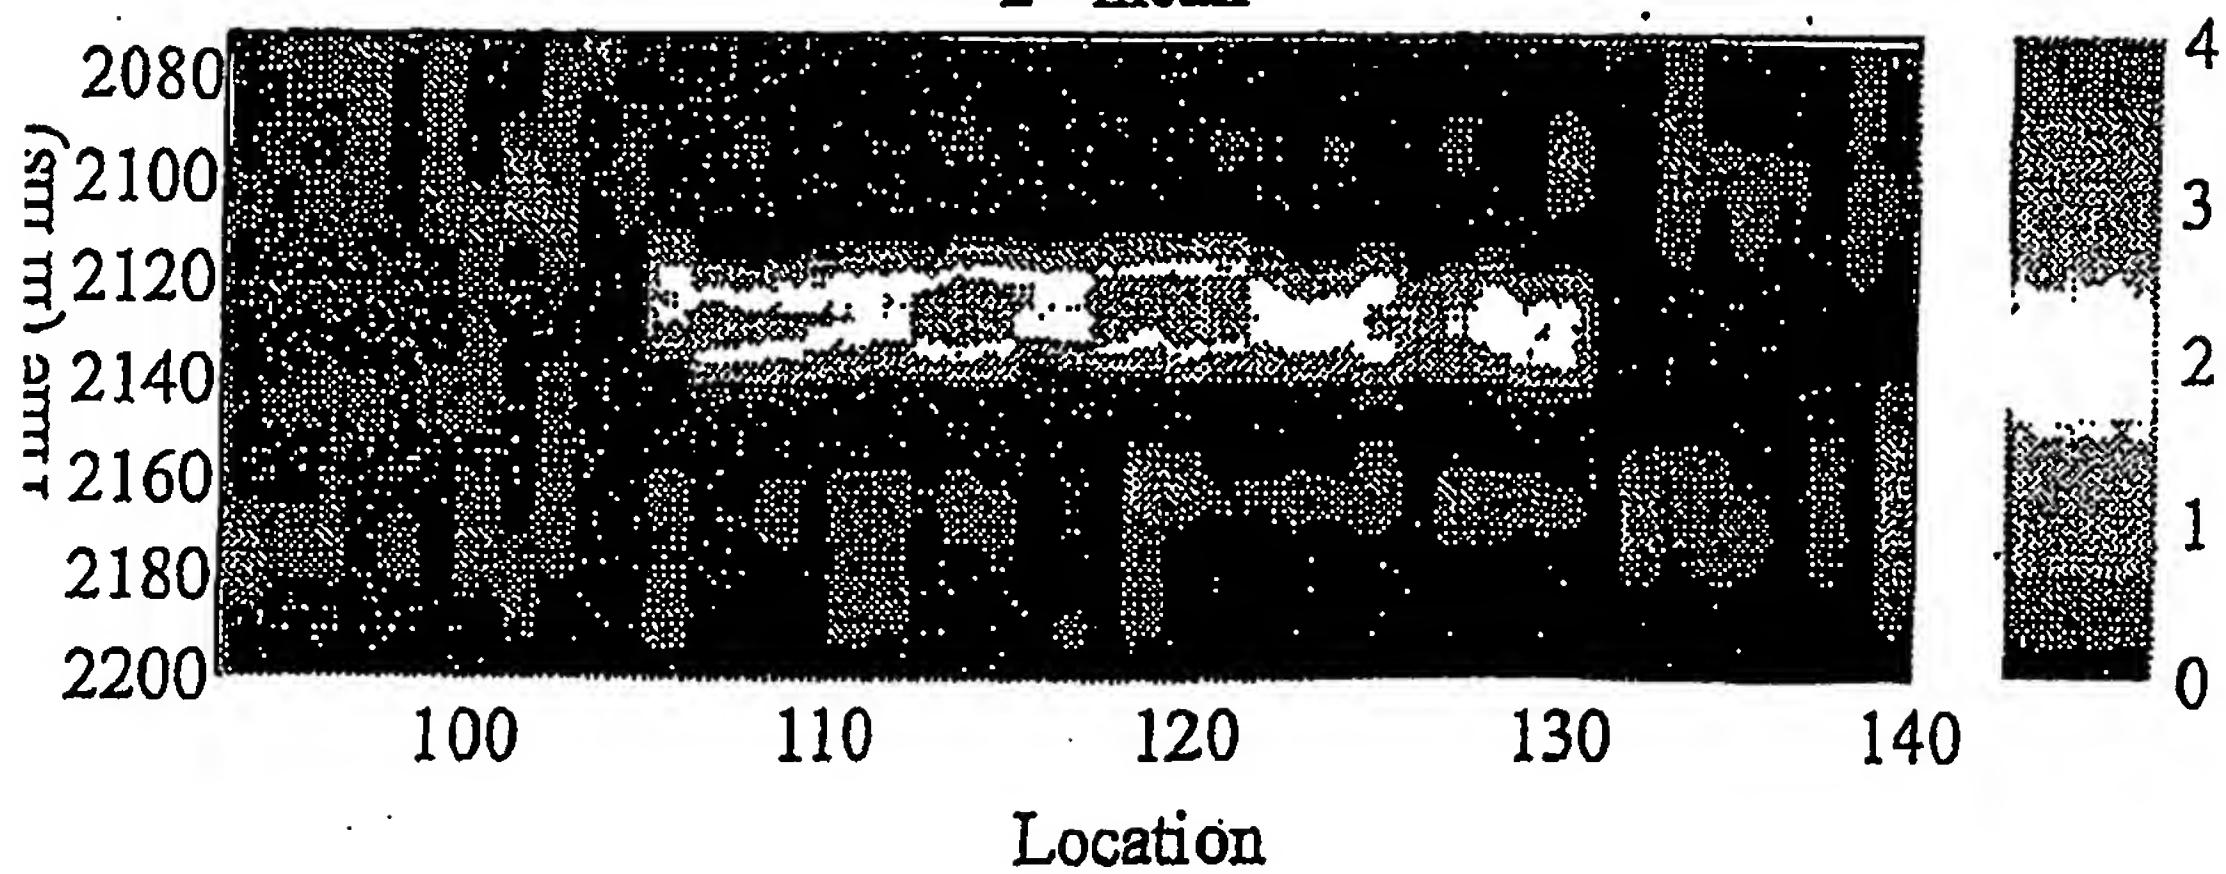

(c)

FIG 5

6 / 7

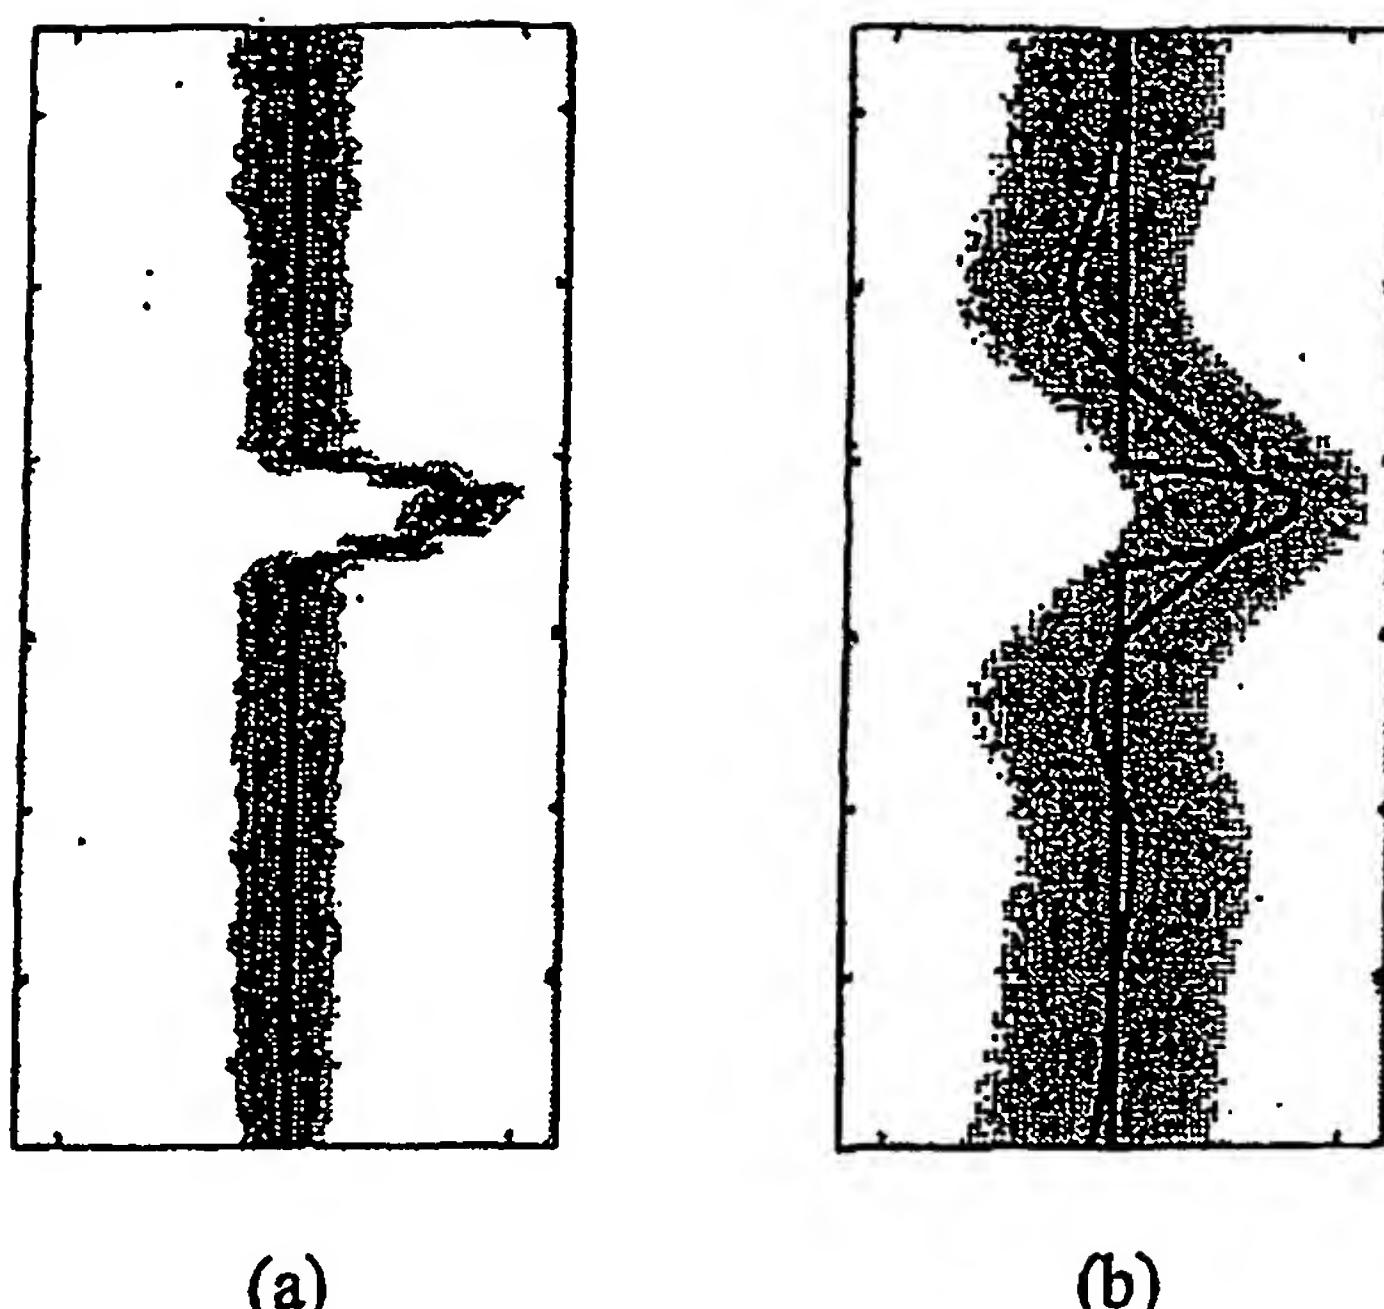


FIG 6

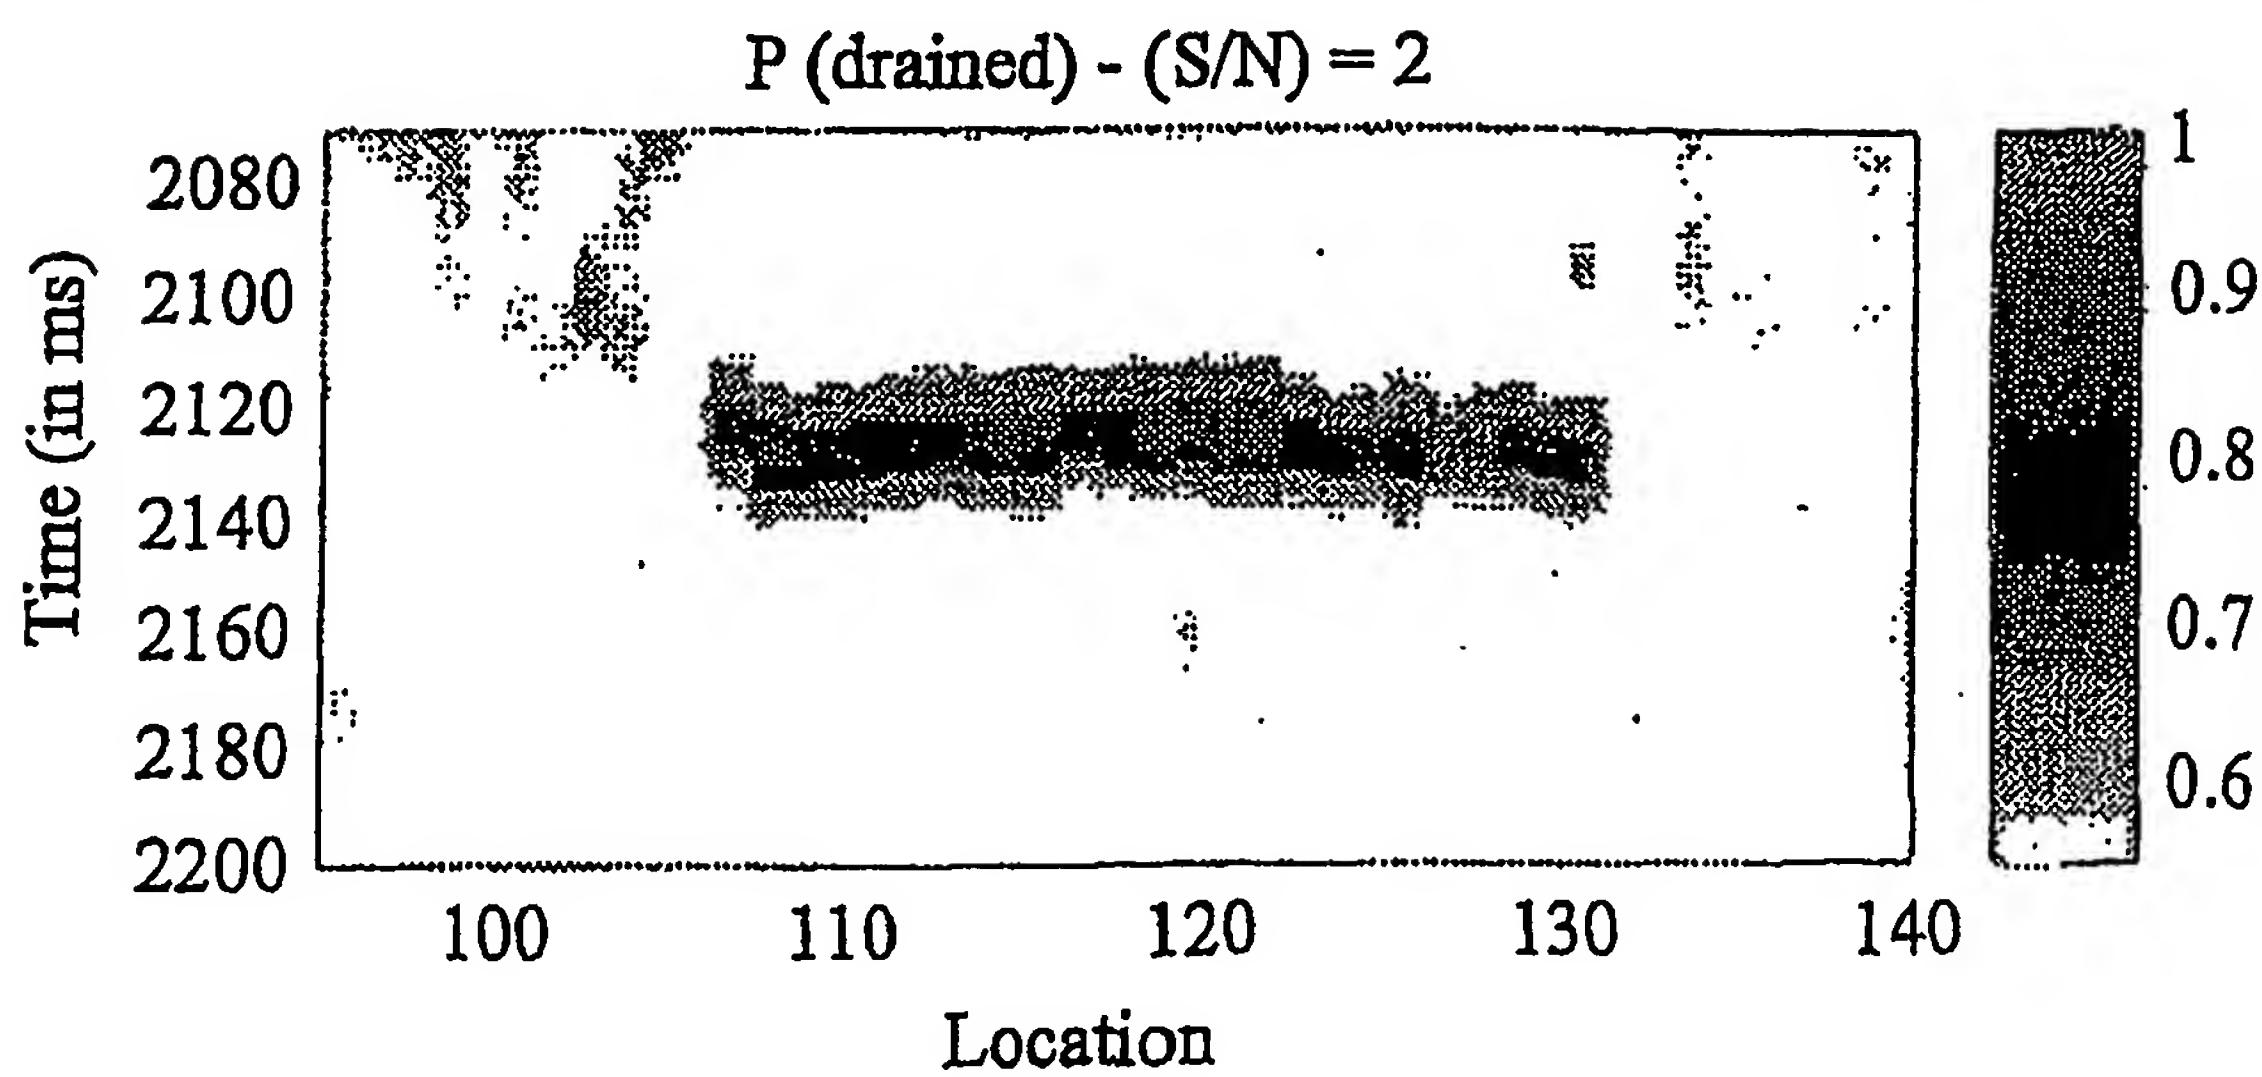


FIG 7

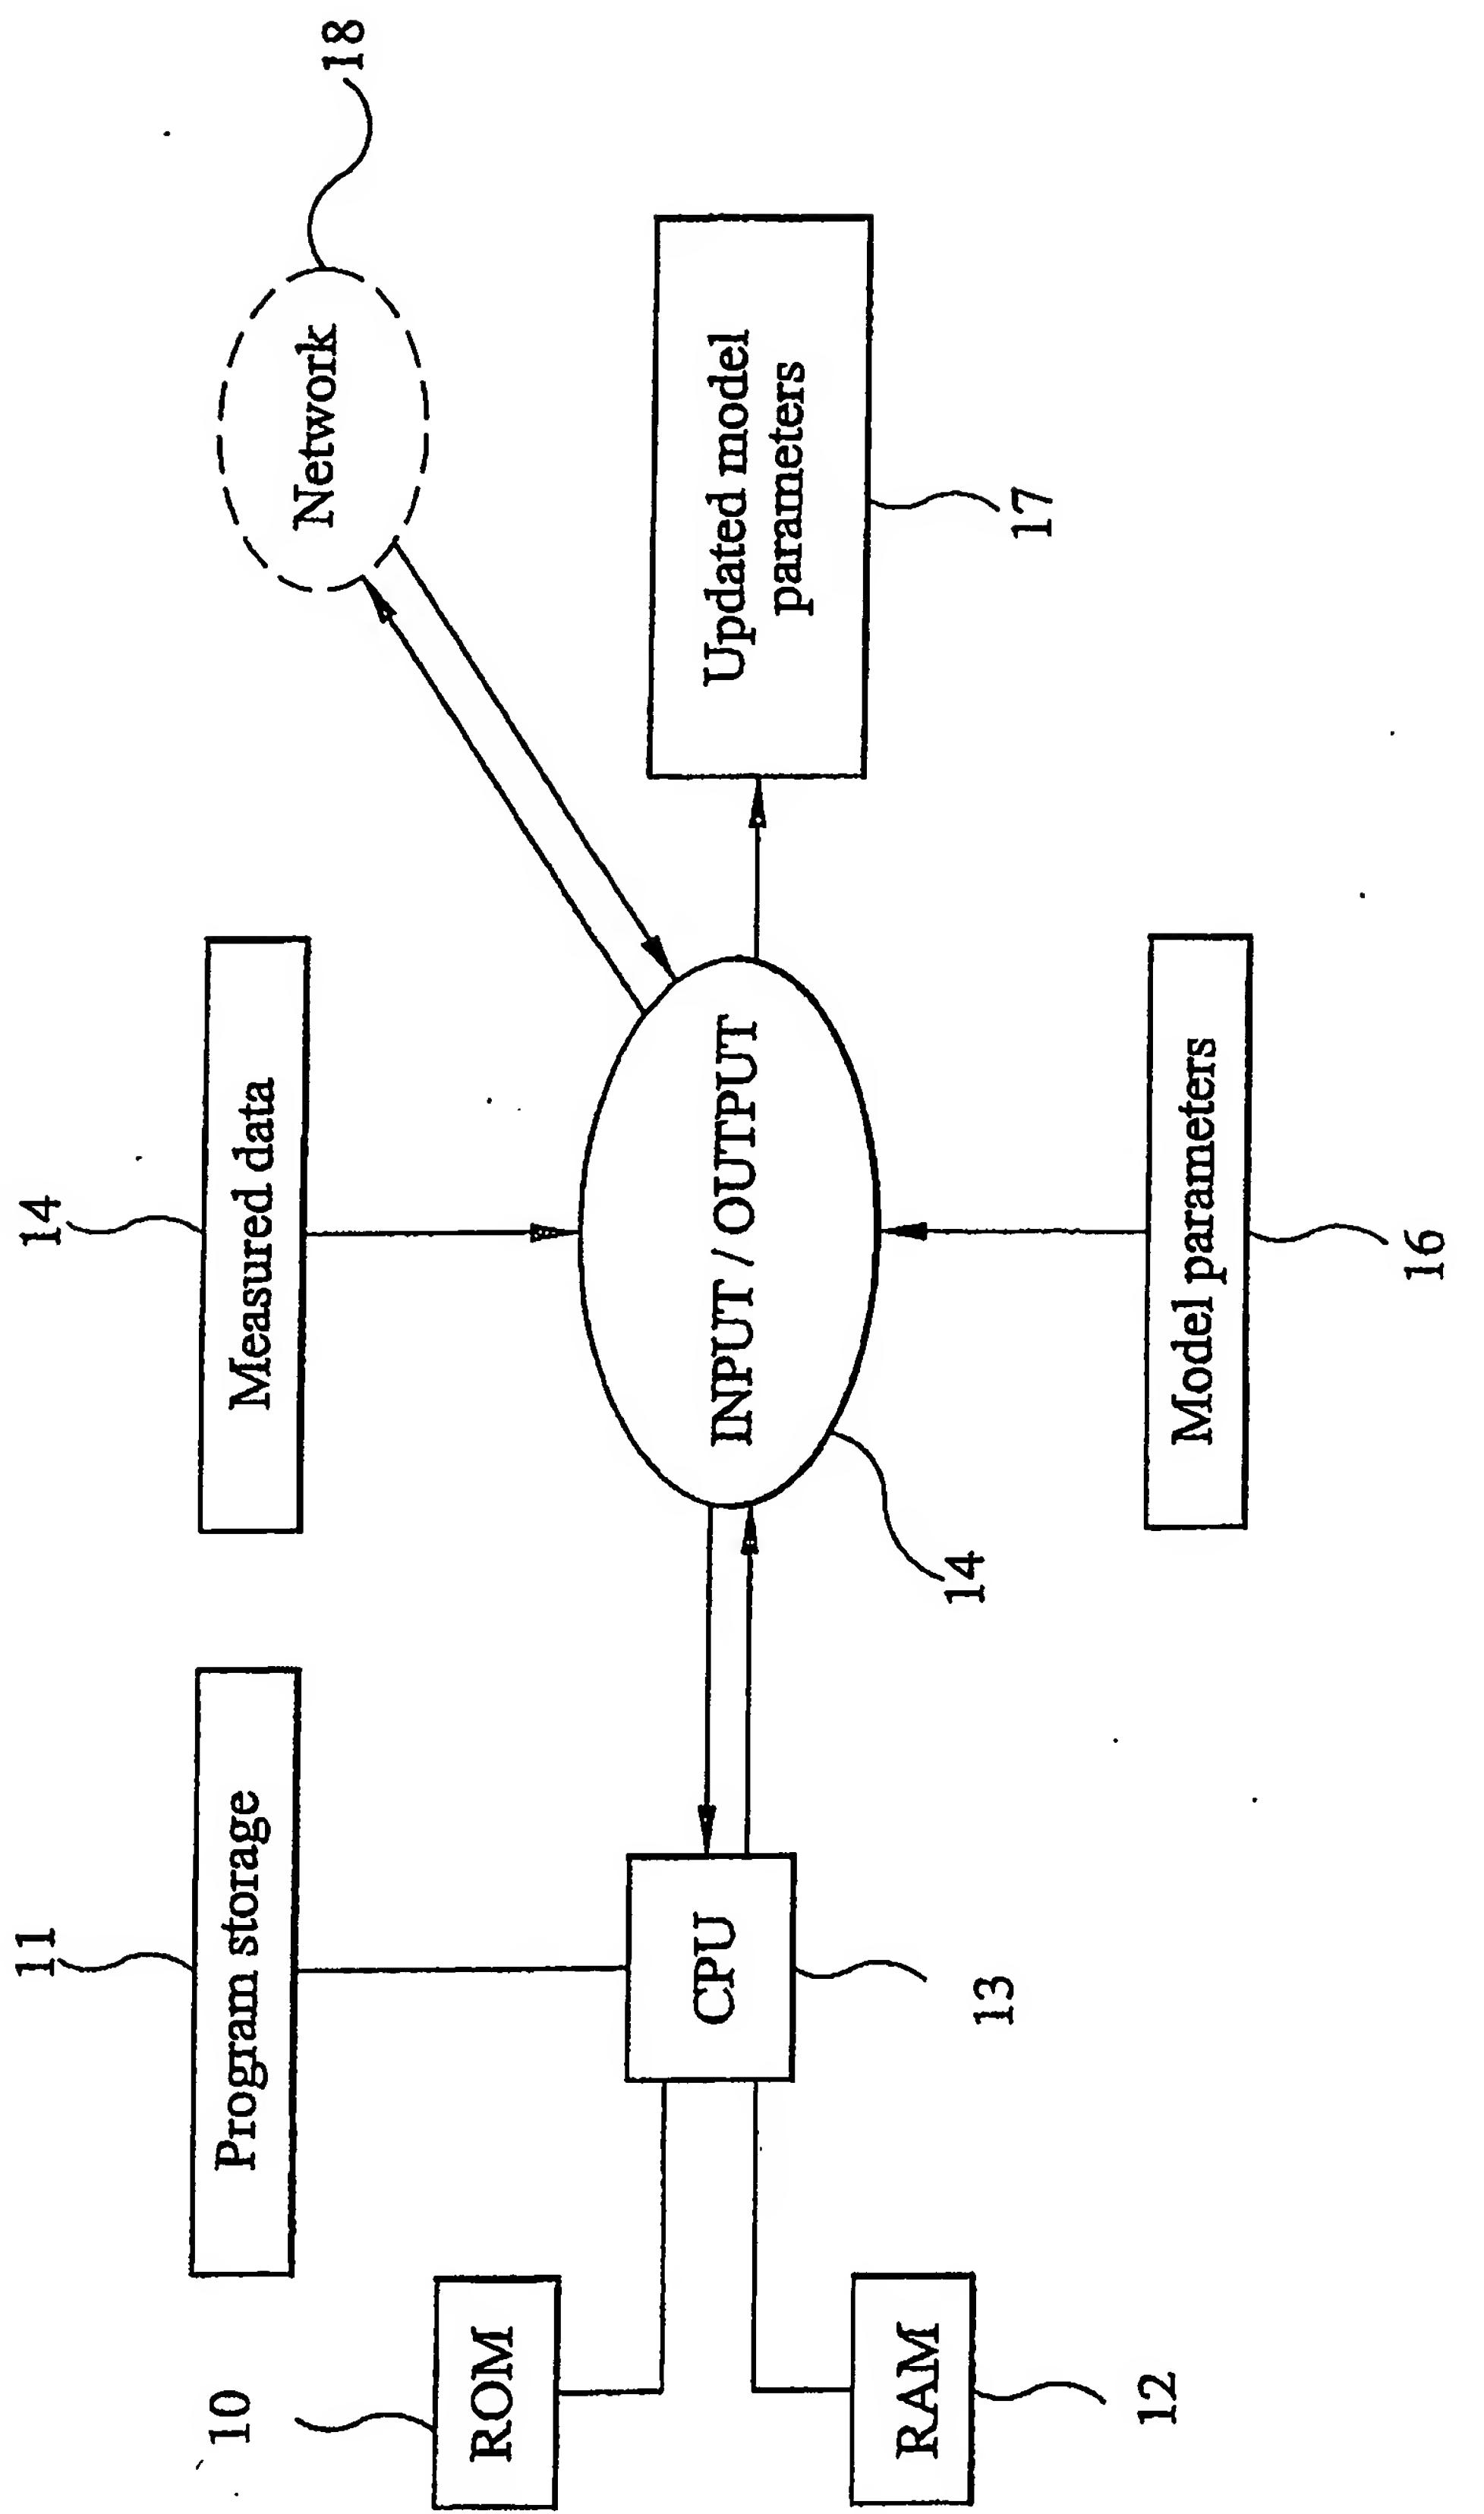


FIG 8